

SPECIFICATION SHEET CDMD8.1.x

DESCRIPTION:

MEDIUM DUTY FLOOR DRAIN

SELECT COVER/GRATE TYPE:

☐ LINEAR SLOTTED PATTERN (C)

☐ RADIAL SLOTTED PATTERN (B)

☐ PERFORATED PATTERN (E)


☐ SOLID COVER (A)

SELECT PIPE SIZE:

□ 2"

□ 3"

□ 4"

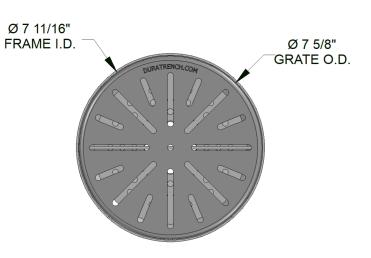

MD FLOOR DRAIN ASSEMBLY **TOP VIEW**

Ø 7 13/16"


FRAME O.D.

MD FLOOR DRAIN ASSEMBLY

SIDE VIEW

1/4"

1 1/2"

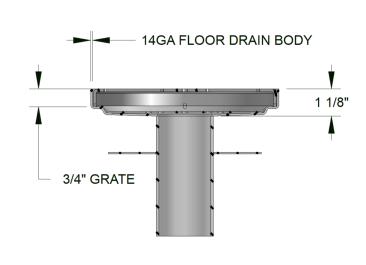


MD FLOOR DRAIN ASSEMBLY


ISOMETRIC VIEW

MD FLOOR DRAIN ASSEMBLY **SECTION A-A**

TOP COVER/GRATE OPTIONS



TOP COVER / GRATE, MULTIPLE PATTERNS AVAILABLE



18GA STRAINER W/ Ø1/4" PERFORATIONS

CDRK6


RESINKEY CREATED

FLOORING AROUND

FLOOR DRAIN

KEYWAY IN CONCRETE

FOR THICKENED RESINOUS




ANCHORING RING


MD FLOOR DRAIN ASSEMBLY **EXPLODED ISOMETRIC VIEW**

PRODUCT DATA T316 STAINLESS STEEL MATERIAL: FINISH: BEAD BLAST **LOAD RATINGS** ASME: MEDIUM DUTY MODEL BY: PHONE: 770-505-6575 JDP **DRAWING BY:** JDP 296 INDUSTRIAL BLVD. N. DALLAS, GA 30132 **REVIEWED BY:** SML 222 WEST 33RD ST. DATE: 04/25/2025 OGDEN, UT 84401 SCALE: NTS 13300 RAMBLEWOOD DR. CHESTER, VA 23836 REV#: WWW.DURATRENCH.COM

LINEAR SLOTTED PATTERN



PERFORATED PATTERN



RADIAL SLOTTED PATTERN



FRACTIONAL = ± 1/8"

TOLERANCES

ANGULAR = $\pm 0.5^{\circ}$